


For Earth, For Life  
**Kubota**

**DMC**

**KUBOTA  
DMC SERIES**



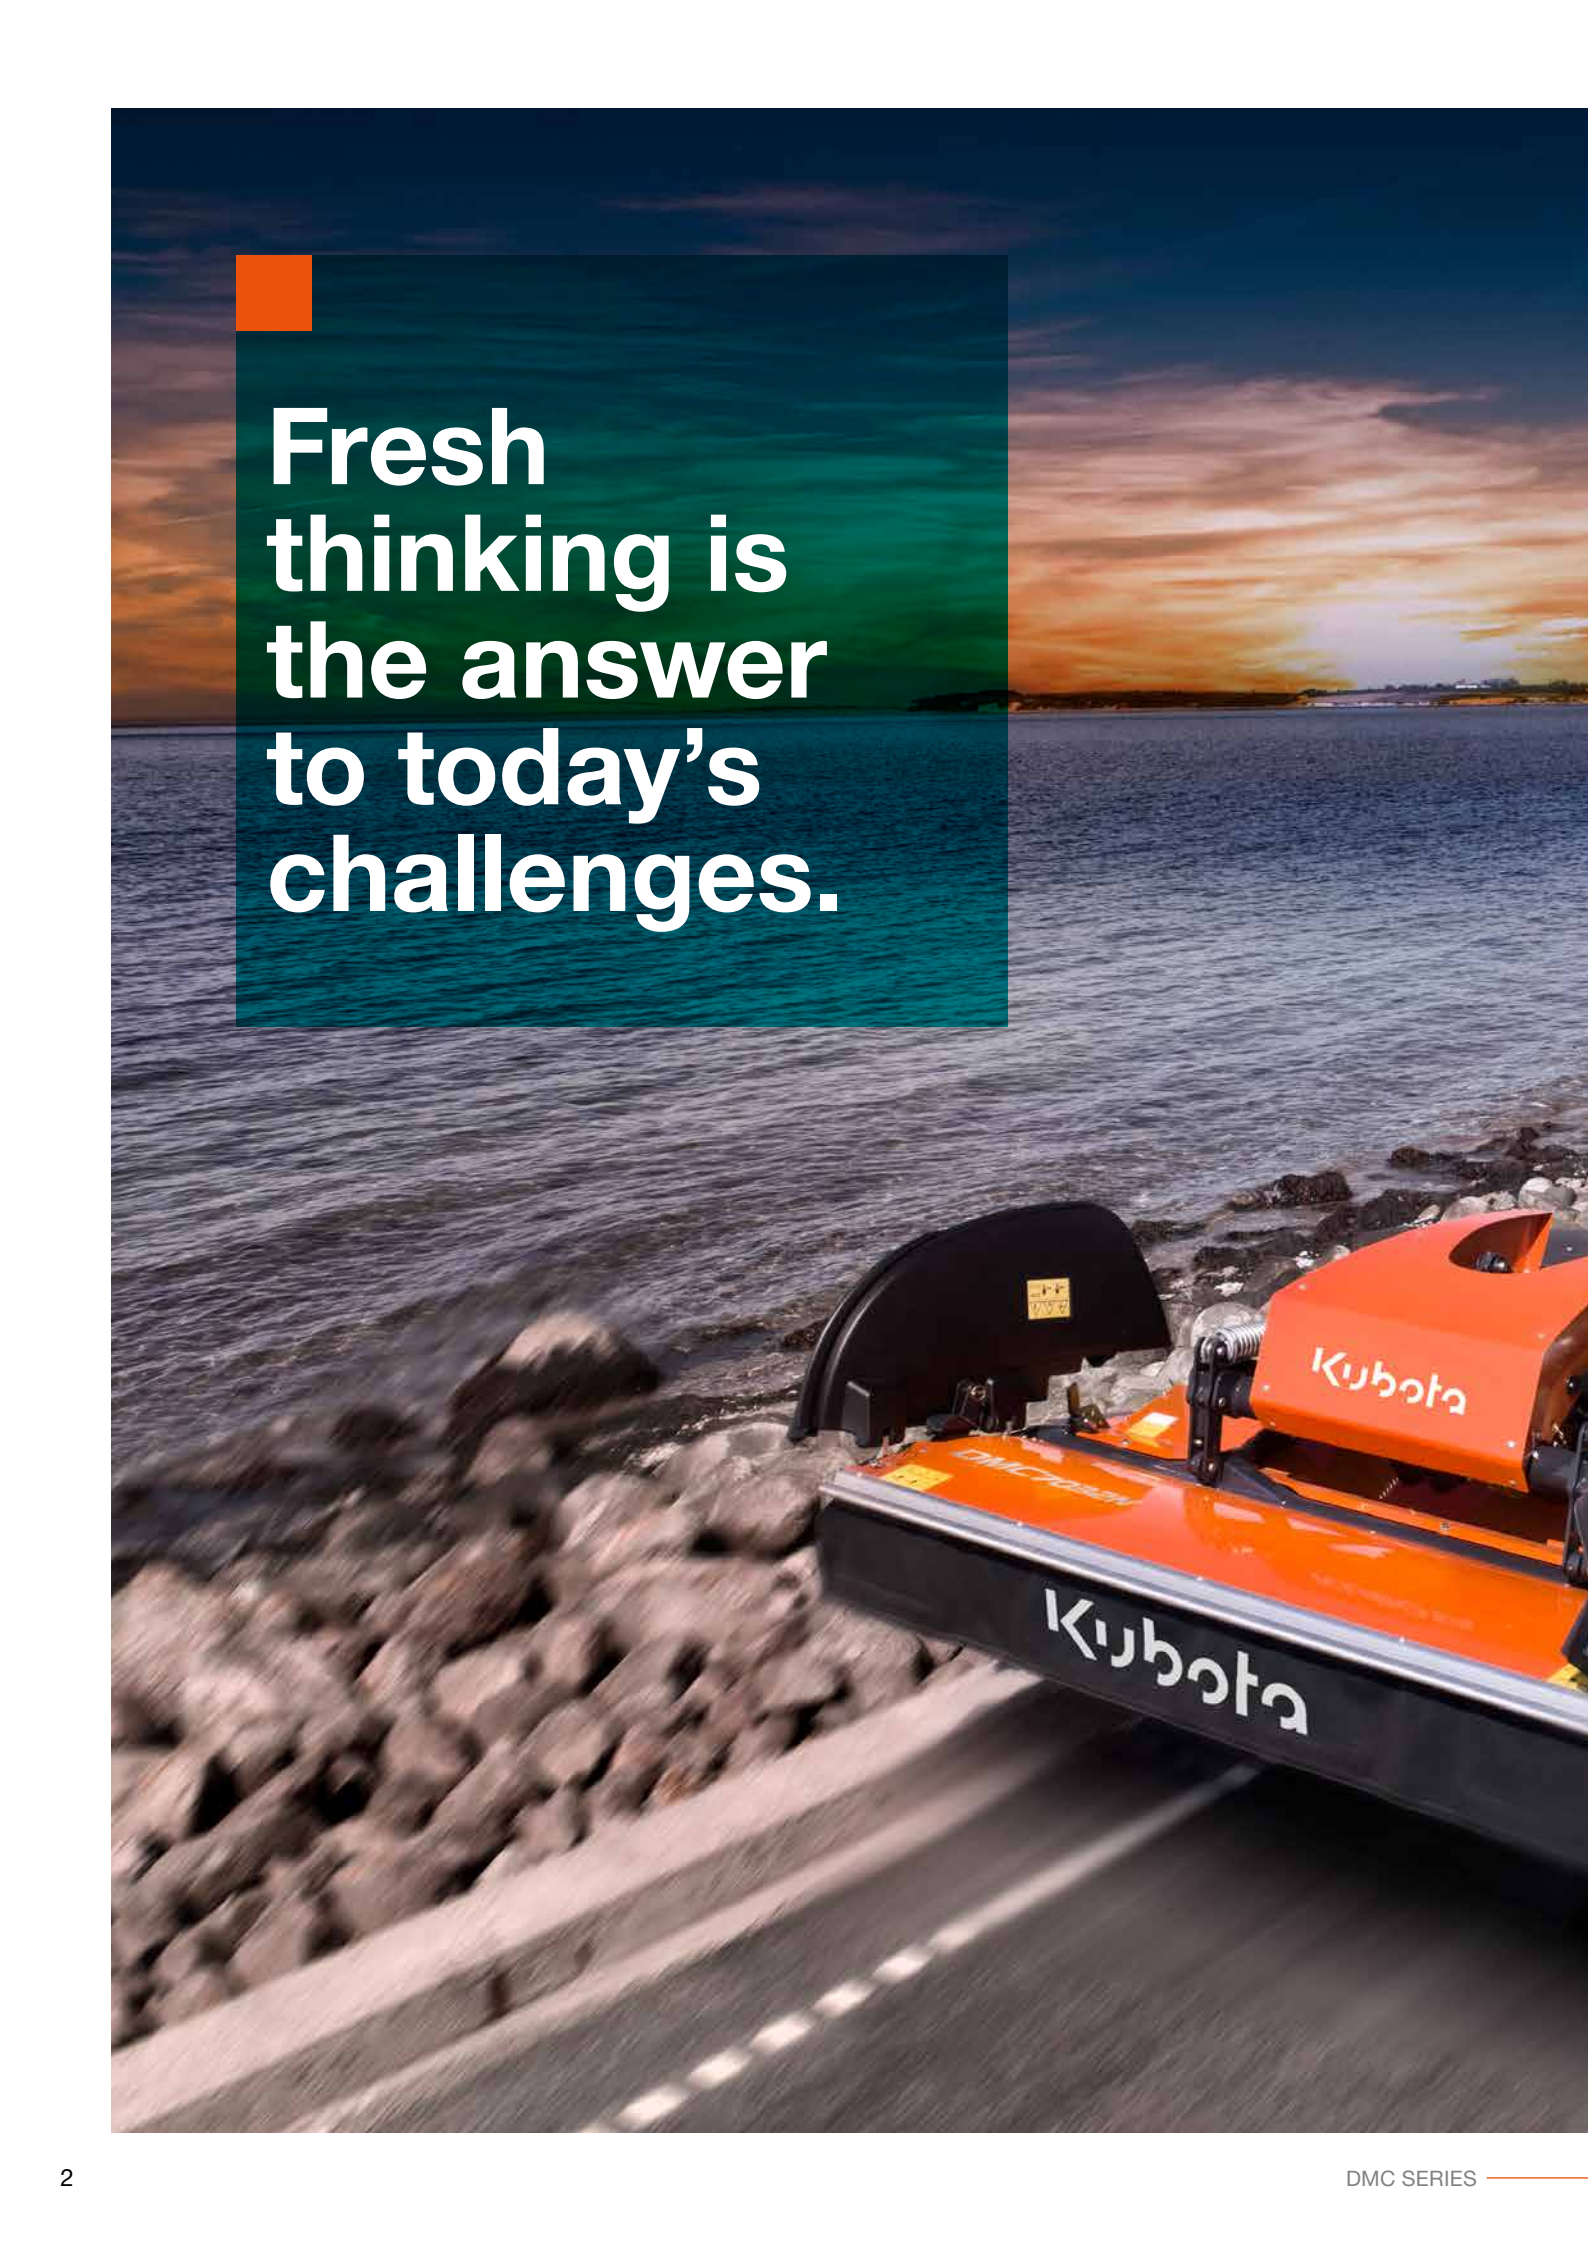

A Kubota DMC Series autonomous boat is shown in the foreground, moving along a rocky shoreline. The boat is orange and black, with the Kubota logo prominently displayed on its side. The background features a body of water and a sunset sky with orange and blue hues. A semi-transparent teal box with an orange square in the top left corner contains the text.

**Fresh  
thinking is  
the answer  
to today's  
challenges.**



The challenges facing the agricultural sector are becoming increasingly bigger. And when times are tough, only one thing helps: a new way of thinking. Envisaging alternative options and making smart decisions. For your next tractor purchase, this means opting for efficiency instead of image. For a tractor that can do tough work with top performance whilst under constant strain. And all that at a reasonable price. A Kubota tractor is exactly the right alternative at times like these.





# Cutting performance in new dimensions



## **Triangular discs with 3 blades**

Experience better cutting performance. The Kubota cutterbar is fitted with 3 bladed discs. They provide 50% higher cutting frequency for more cuts.

## **Always counter-rotating discs**

All Kubota cutterbars have an even number of counter-rotating discs, meaning discs always work in pairs. This provides generous overlap between all discs and a better crop transport.

## **Strong and sturdy cutterbar design**

The fully welded cutterbar with overlapping C-profiles makes for a rigid and strong design, ensuring high level of durability.

## **Low noise cutterbar**

Low maintenance cutterbar with quiet operation thanks to the specially tooled gear wheels.





### Did you know?

Did you know that Kubota produces its own engines and that Kubota is the global market leader for industrial diesel engines under 100 hp? You might be surprised to learn under which bonnets Kubota engines are at work. Top quality and efficiency are the main ingredients of this success.

**The Kubota cutterbar is engineered with durability and excellent cutting performance in mind. The fully welded cutterbar is designed for long and demanding workdays with maximum uptime. The triangular disc provides excellent cutting performance, leaving a clean cut stubble.**



### **Always counter-rotating cutting discs for improved overlap**

Don't compromise on your cutting performance. All Kubota mowers have an even number of counter-rotating discs, meaning discs always work in pair and turn towards each other. This provides maximum overlap between all discs and a better cut. In addition it efficiently and immediately transports the crop to the rear.

### **Three-bladed discs for more cuts**

Kubota cutterbars, with the triangular shaped discs, are known for their excellent cutting performance. They provide a 50% higher cutting frequency compared to conventional solutions.

With three blades per disc Kubota mowers are constantly cutting. This means a third less load per knife and an even load on the drive and smoother power usage in addition to producing a neat, clean cut stubble.







# The cutterbar made to perform

### **Strong fully welded cutterbar**


The Kubota cutterbar provides increased uptime with its fully welded design. The fully welded cutterbar with overlapping C-profiles makes for a very rigid and strong design, ensuring very high level of durability. It is designed for years of hard work.

### **The low noise cutterbar for comfortable work days**

The Kubota cutterbar is renowned for its low noise level during operation. This is thanks to specially tooled gear wheels with round design and long teeth for efficient power transmission – convenient during a long and busy working day.

The long curved gear wheels run smoothly in oil and provide lots of power transmission with little slack. The risk of the gearwheels “catching” on the corners is minimised by the special “round” design, which in turn reduces wear and noise.



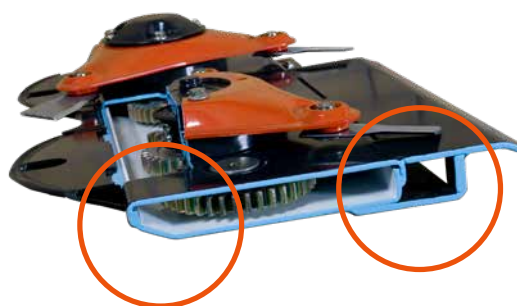

#### **Fully welded cutterbar**

Fully welded cutterbar with overlapping C-profile for a strong and durable construction. High oil capacity ensures low working temperature.



#### **Kubota hubs**

The hubs provide efficient transfer of power and reduced power consumption.



#### **Low noise cutterbar**

Low noise level thanks to specially tooled gear wheels with round design and long teeth for efficient power transmission.



#### **'Express' – easy and quick change of knives**

With Express quick change system replacing or turning knives is easily done. All disc mowers in the Kubota range can be fitted with the 'Express' system.





# Effective conditioning: what makes SemiSwing stand out

**Utilizing the centrifugal force is what makes the Kubota SemiSwing conditioner stand out to other conditioner systems. It offers aggressive conditioning effect with excellent protection of the tines and virtually no wear.**

### **Aggressive conditioning – minimum blockages**

SemiSwing gives you aggressive and full conditioner effect. When the rotor starts the SemiSwing tines will instantly move into their working position and stay in a fixed position.

The angle and position of the SemiSwing tines ensures best possible crop transport. The crop is moved away from the conditioner rotor towards the conditioner plate. The result is reduced risk of blockages and optimum use of the conditioner plate.

### **Excellent tine protection – no maintenance**

When hitting an obstacle, the SemiSwing steel tines are able to pivot backwards and let obstacles pass through. This allows large obstacles (up to 103mm) to pass without breaking the tines. No broken tines will end up in the following pick-up and no repair is required on the conditioner rotor. It requires a weight of 22kg on the tine to pivot the Semi-Swing tine backwards.

This means the tine will stay in a fixed position during conditioning. The benefit is no movement during rotation, meaning virtually no wear and tear on the brackets and full conditioning effect.

To customize conditioning effect to changing conditions the conditioner plate can be set in 3 different positions.

Efficient crop transfer. Crop is efficiently lifted away from the cutterbar and moved along the conditioner plate for effective conditioning effect.

Aggressive conditioner effect with steel tines – tines will stay in a fixed position for full conditioner effect.

Reduced wear – no constant movement of conditioner tines – virtually no wear on brackets or tines.

Excellent tine protection. Large obstacles are able to pass through, as the tines can pivot backward.

Wide and full width conditioner rotor for efficient crop throughput, full conditioning effect and reduced fuel consumption.

Once in working position the tine is locked by the rotor in its forward movement and will stay in full working position.







# Higher level operator comfort: a quick change artist

Performance and maximum comfort. This concept combines both to meet the exacting demands of any job in the field. The conditioner hood can be independently adjusted at both front and rear ends to customize the conditioner to crop intensity, for improved grass flow and power consumption.






The front end (1) is adjusted separately to suit the crop intensity, even for massive crop, to avoid any blockages.

### Heavy or light crop


The front end (1) is adjusted according to amount of crop. In heavy, tall crop the conditioner hood is opened, to avoid blockages and ensure smooth efficient flow. In short crop, a smaller opening is preferred.

### Aggressive conditioning or fuel saving

The rear end (2) allows adjustment related to power consumption and aggressiveness of conditioning. A large gap between conditioner and hood means less aggressive conditioning and minimized power consumption. A small gap is chosen when very aggressive conditioning is preferred.

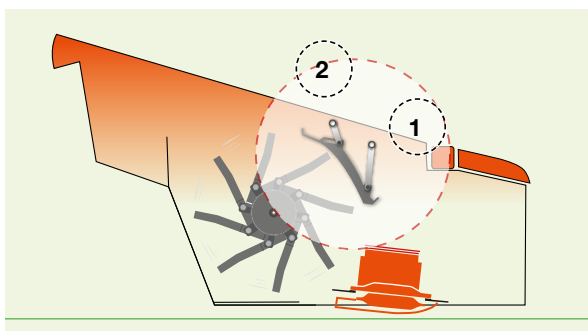

Front and rear end fully closed, for efficient conditioning in low crop conditions.

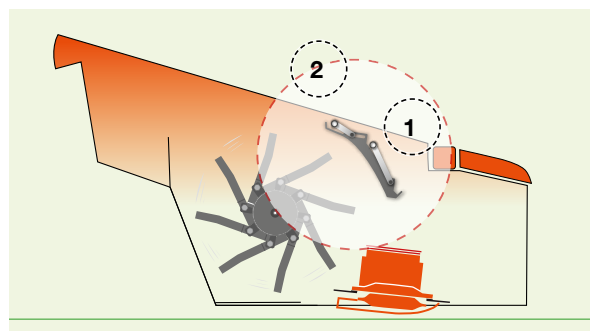


Front and rear end open, allowing unobstructed passage of massive amounts of crop.






# Gentle roller conditioning

**Preservation of nutritional value. Roller conditioning provides gentle, yet effective handling of fragile crop such as alfalfa or clover. Roller conditioning effectively cracks stems and their wax coating, while still preserving the nutritious leaves. This in turn facilitates an even drying pattern and full utilisation of the forage.**

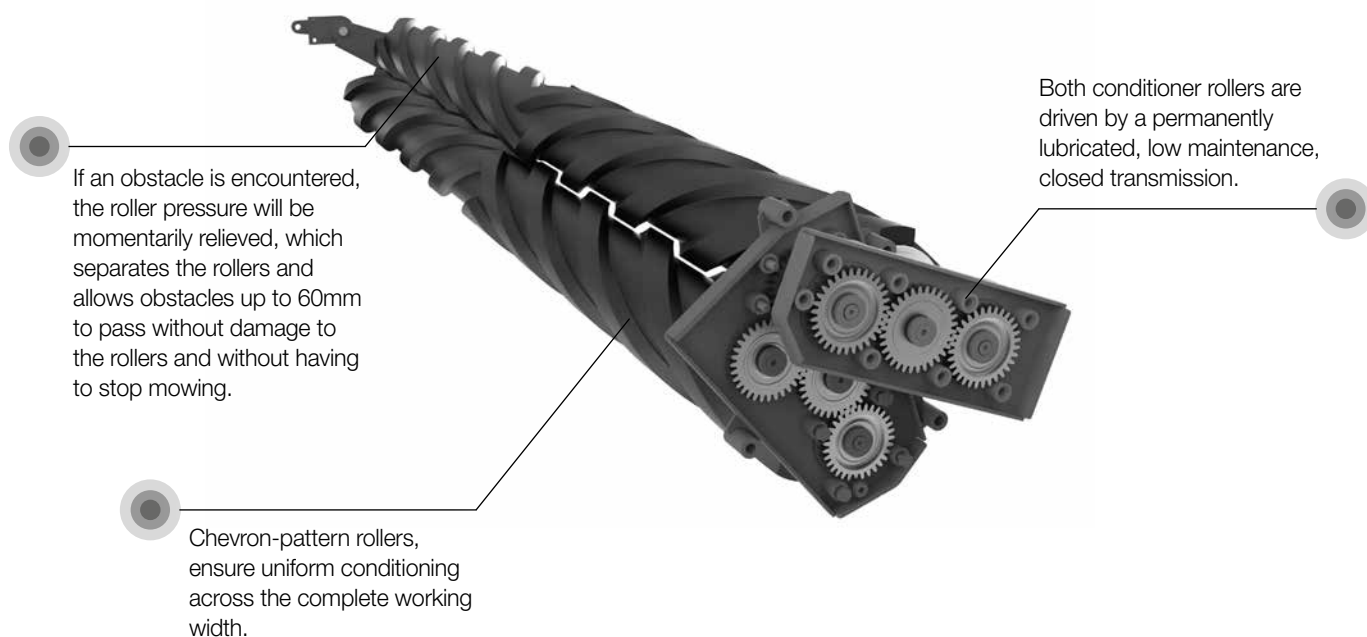

#### **Chevron rubber rollers**

The 225mm diameter wide rubber rollers, made from highly durable polyurethane, are vulcanised onto a steel core. This process guarantees straight rollers that will not twist out of shape, regardless of the force transmitted onto them. The chevron pattern actively directs the crop away from the cutting discs, which enables the best possible cutting quality, while limiting the power requirements needed.

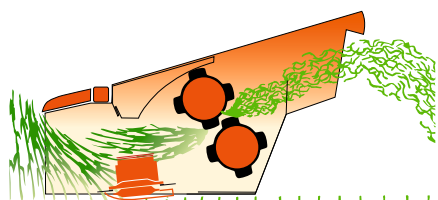

The special roller configuration, with the top roller located further forward than the bottom roller, provides outstanding upwards flow of crop. No need for an extra roller.

#### **Full-width conditioning**

The Kubota machines feature two full-width chevron, counter-rotating conditioning rollers, with the top roller located further forward than the bottom roller. This unique design ensures optimised flow of material from the cutting discs toward the rear, making complicated systems with extra guiding rollers, as seen in other systems, obsolete.

Additionally, the full-width design allows for the distribution of crop into a thinner mat, increasing the amount of crop in contact with the rollers.





# QuattroLink® Racecar Technology Applied for mower conditioners

Do the mowing job better, more accurate and faster with QuattroLink. Our groundbreaking suspension concept provides accurate tracking ability and highly flexible working range to deliver the best mowing performance.

1

## More accurate ground tracking


What makes the QuattroLink® concept unique? The four suspension arms provide the mowing unit with an exceptional flexibility in adapting instantly to demanding ground contours, inviting for higher speed and more productivity. The mowing pattern is highly flexible with a vertical working range of 700mm and a transverse working range of 30°.

2

## Better weight distribution

The QuattroLink® concept is all about providing the best possible ground tracking. The mowing units are hydraulic suspended, with hydraulics integrated directly into the QuattroLink suspension. This provides the optimum weight distribution and protection of field and stubble. Ground pressure remains constant, even when following ground contours up and down.



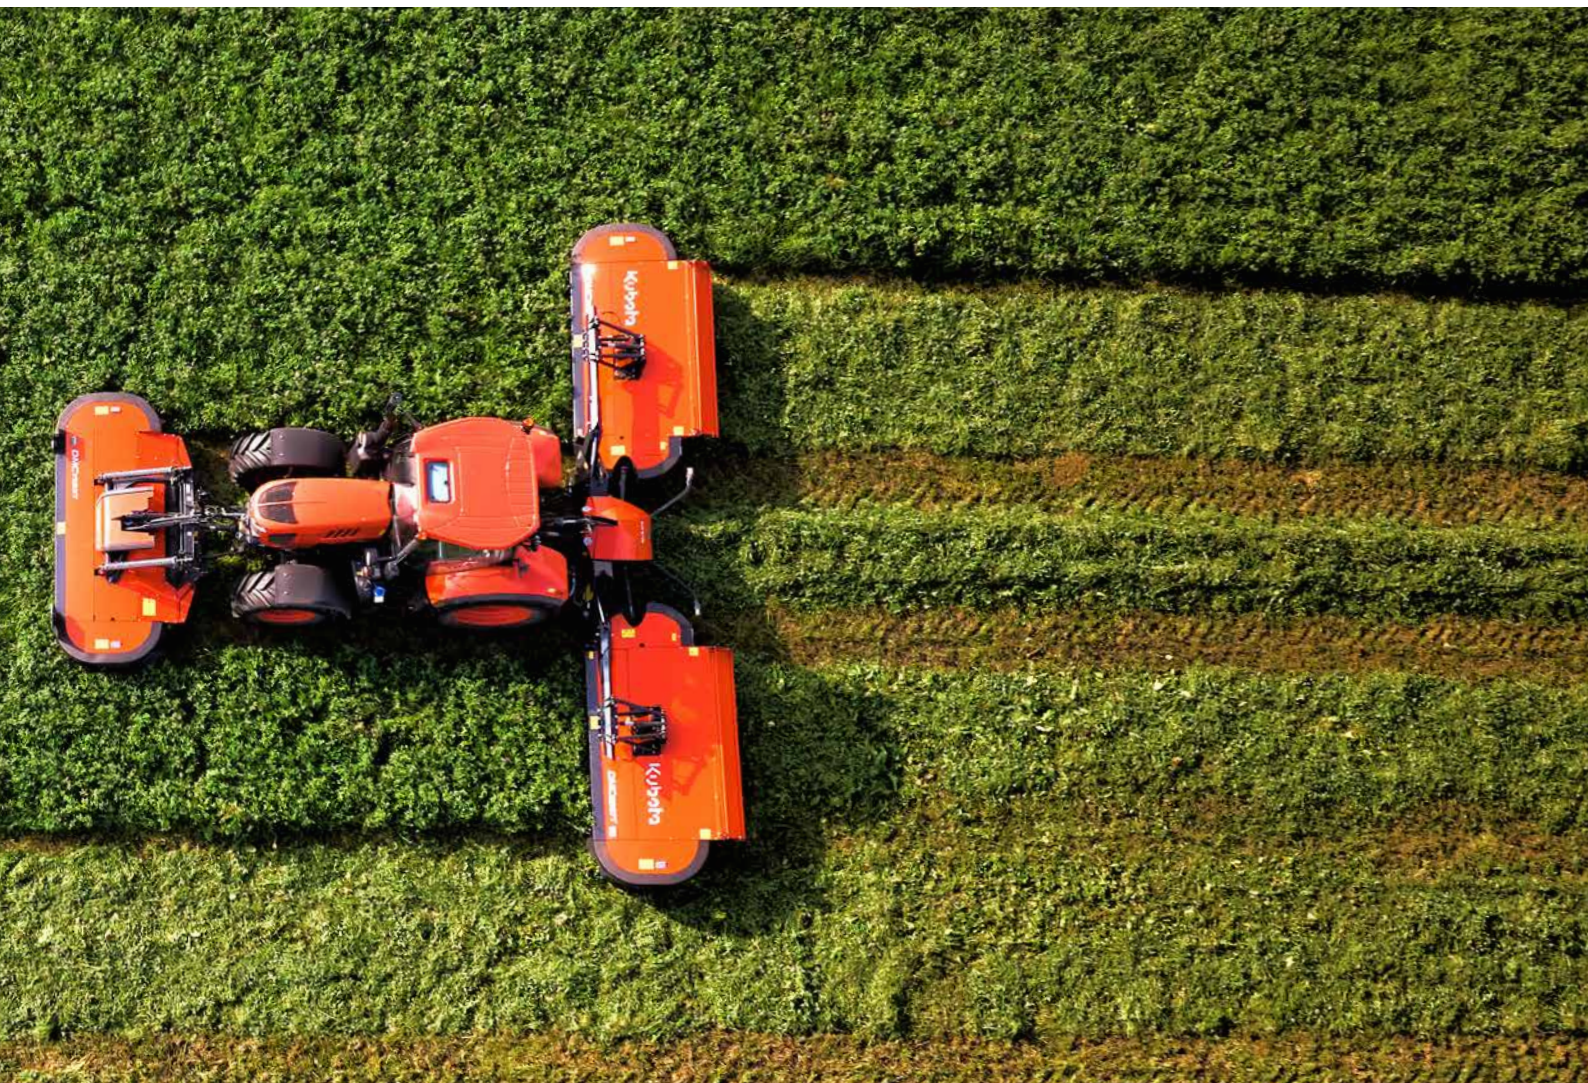

# 3

## Faster mowing job

Like a racecar you want better tracking to go faster and ability to instantly adjust to changing field conditions. Simply get from A to B in less time. The QuattroLink® suspension concept provides the mowing units with an exceptional flexibility in adaption to demanding field conditions, inviting for higher speed and more output.

# 4

## Increased peace of mind

QuattroLink® suspension concept provides full flexibility in adaption to ground contours. It offers protection across the full working width of mower, including the part closest to the tractor. There are no limiting factors on the inside part of the mower, giving the driver true peace of mind when operating during a long demanding workday.





#DMC6300-DMC64100



QuattroLink®

Exceptional Flexibility



# Designed for excellent performance and precision

The QuattroLink® suspension concept has set the standard for efficiency, performance and uptime. It is our high-end suspension concept for the most demanding terrains. With its pulled suspension concept and integrated hydraulics it provides the ultimate solution in accurate ground followings.



## 100% Non-Stop BreakAway

The QuattroLink® suspension provides full protection across the complete working width of the mower. Even on the inside part closest to the tractor. When encountering an obstacle in the field the mowing unit will swing backwards and over the obstacle, even on the inside of the mower, and then return it to the original working position. No need to stop – no time lost.



## Integrated hydraulic suspension concept

The mowing units are hydraulically suspended, with the hydraulics integrated directly into the QuattroLink® suspension, right above the mowing unit. This provides the optimum weight distribution and protection of field and stubble. Ground pressure remains constant, even when following ground contour up and down or if the overlap and working width is adjusted on the Vario versions.



## Pulled suspension solution

The QuattroLink® suspension directly translate into exceptional ground following ability with it pulled solution. The four suspension arms provide an adaptation range of 400mm upwards and 300mm downwards for accurate tracking.



## No compromises on flexibility

QuattroLink® is made for the extreme conditions. With it highly flexible working ranges it efficiently adapts to uneven field conditions with a transverse working range of 30°.





#DMC6332-DMC6336



# Smart engineering: efficient operation

## **Below 3.70m transport height**

All DMC6300 series folds hydraulically for transport and will reach a transport height below 3.70m. The complete weight is spread evenly on both rear tires, with a 50/50% weight balance. This means the tractor is not sliding to one side during transport, providing extremely stable running characteristics of tractor and mower during the transport, inviting for higher transport speed.

## **Parking, safe and sure-footed**

With the integrated parking solution, storage of the DMC6300 series is made easy and convenient, requiring a minimum of space during winter storage. The mower is firmly parked on strong and stable parking feet.



Ground pressure is easily set from the tractor seat, hydraulically with an easy to read pressure scale on the mower for clear guidance.



Minimum 500mm ground clearance across the complete mowing unit during headland turns.



When parked during vertical storage, the lift arms are always in a horizontal position, making it very easy to mount or dismount the mower from the tractor.



Position of the mowing unit can be adjusted infinitely within a 150mm span on the carrying arm, allowing cutting position of the rear mower conditioner to match working width of the front mounted mower conditioner or rear wheels of the tractor.





# Hydraulic adjustment of overlap: unique solutions

**Unlock the Full Potential of Your Mower. Ensuring the correct overlap between front and rear mower is essential to maximise your mowing job. Too little overlap immediately causes problems when field conditions change. Too generous overlap limits you from utilising the capacity of the mower combination to the maximum, eventually leading to reduced productivity.**

### **Vario means more productivity**

DMC6336T Vario is fitted with hydraulic SideShift integrated into the carrying arm allowing each mowing unit to move 400mm. To easily compensate for changing field conditions, the adjustable overlap is designed as a telescopic arm, directly into the suspension.

### **Adjust on the GO**

Adjusting the overlap is quickly done hydraulically from the tractor cab, and the chosen overlap is easily registered from the scale on the suspension arm. Increase overlap when mowing odd sized fields, going around corners or operating on slopes to ensure no stripes are left behind. Reduced overlap on flat and even fields to improve performance and cutting width as much as up to 10%.


### **ComfortControl**

The optional ComfortControl joystick of the DMC6300 series provides the extra comfort of electro hydraulic folding for transport. Easy and simple.





Full overlap.



Working width utilised to the maximum.



DMC6336T Vario in transport. The telescopic frame arm moves to the lowest possible position to reach a transport height of only 3.70m.



### Did you know?

Did you know that Kubota is not only one of the top-50 most recognised brands in Japan, but also one of the largest tractor manufacturers in the world? In 2014 alone, Kubota produced more than 180,000 tractors.

### Ground pressure remains constant

During mowing operation the carrying arm always remains even to the ground, giving the mowing unit the freedom to instantly compensate and float across uneven ground contours. The true benefit of the suspension concept is that even though overlap is changed, the chosen ground pressure remains the same.

No need to stop and adjust, reset and control the ground pressure before you can go on. Just set the mower to the requested overlap and mow on.

### Easy change-over for widespreading

Changing from swathing to widespreading is virtually a one minute job. The swath plates are easily slid to the side and the FlipOver widespreading vanes are turned 180°. No tools are required.





#DMC6387-DMC6395



# Designed for productive results

**The DMC6387 and DMC6395 triple mowers are designed to make easy work out of the hardest job. These triple mowers offer the ideal combination of capacity and simple operation.**

## **High performance mowing**

The DMC6387 and DMC6395 excel in efficient mowing performance with the QuattroLink racecar suspension concept that provides the mowing units with exceptional flexibility in adapting to demanding crop conditions.

With an intuitive design these mowers are easily adjusted and set for operation with simple control functions. This is a triple mower that gets the job done.





Both models fold into a safe transport position, above 90° for stable weight distribution and importantly to keep the mowing units away from tree tops during transport. The outer guards fold hydraulically into transport position (optional), with no need to leave the tractor cab.



With the integrated parking device, storage is made easy and convenient, requiring a minimum of space during winter storage. The mower is firmly parked on strong and stable parking feet, bringing total height below 4.00m.



Minimum 500mm ground clearance across the complete mowing unit during headland turns. Mowing unit is raised and carrying arm tilted to a 10° angle.



The position of the mowing units can be adjusted infinitely within a 150mm span on the carrying arm to match the working width of the front mounted mower conditioner.



All hydraulic functions are controlled via the tractor valves in combination with a pre-selection PilotBox.



DMC6387 and DMC6395 are easy to handle and standard operated with a pre-selection PilotBox for (individual) lifting/lowering of mowing units and belts and setting of ground pressure.





#DMC6387 BX-DMC6395 BX



# Flexible mower setup: maximum uptime

**DMC6387 BX and DMC6395 BX are our multi-talented mower solutions with their productive BX swath belts. They come with largely dimensioned swath belts designed for heavy crop volumes and demanding conditions, including heavy first cut silage. The swath belts offer significant possibilities to improve productivity and quality of output. Featuring high-speed belts up to 1500rpm, they can carry high crop volumes and place them into even, narrow swaths.**



Swath plates automatically expand when being slid inwards to support efficient and accurate swathing.



The swath belts can be easily disconnected and removed at the moment you don't need them, saving weight and fuel. Optional transport rollers are available to safely park the BX belt when removed for storage.

### Customize the output as you like

Versatility is further enhanced by the three-in-one solution offered by DMC6387 BX and DMC6395 BX, allowing one large swath, three single swaths or full width wide spreading. The standard fitted swath plates are easily slid into position for the desired swath width.

If conditions require wide spreading the mower is fitted with spreading vanes that are activated within minutes. No tools are required. The optional FlipOver widespreading solution provides 100% widespreading across the full working width.

### Drop Excess Weight


Flexibility is paramount to improve work efficiency. DMC6387 BX and DMC6395 BX have the smart option to quickly dismount the two BX belts and park them safely on specially designed transport rollers. Dismounting the BX belts can be done in less than 15 minutes. In this way, you can easily leave unnecessary weight back home when crop merging is not needed.




One large swath from 8.7 or 9.5m working width.



Using one belt to move crop away from field boundaries.

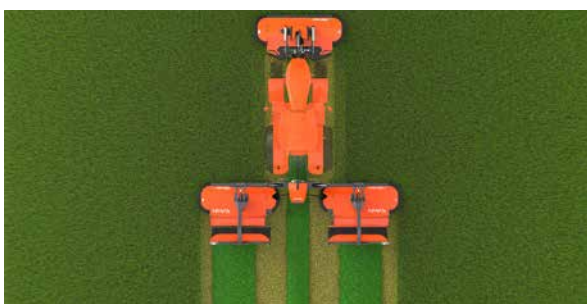

100% wide spreading with the standard spreading vanes.

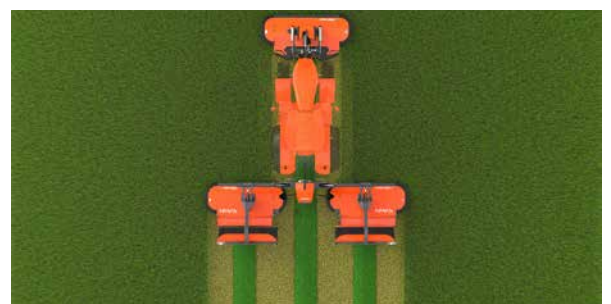

Three single swaths, easy set with the integrated swath plates.





#DMC64100

# Productivity exemplified: cut more, gain more



1  
Minimum 500mm ground clearance across the complete mowing unit during headland turns. Mowing unit is raised and carrying arm tilted to a 10° angle.



2  
The carrying arm is tilted back to bring the mowing unit into an even position before lowering the mowing unit.



3  
Mowing unit is lowered evenly onto the ground without one side touching the ground before the rest of the mower.

### The evolution continues

Maximise your mowing capacity with the DMC64100 series with the QuattroLink racecar suspension concept. The DMC64100 is our most powerful triple mower with 10.2m working width, heavy duty design and strong focus on total cost of ownership.

Packed with innovative features such as full ISOBUS control, CurvePilot curve control, hydraulic overlap adjustment and full width BreakAway protection the DMC64100 is custom-made for long productive working days. But it is the QuattroLink suspension concept and its unique ground following ability that makes this mower combination stand out.

### Efficient headland management

DMC64100 is a mower for working with large crop volumes and huge swaths. It provides generous clearance across the complete cutterbar, including the inside area. When lifting the mower on headlands, the mowing unit is raised and the carrying arm is tilted to a 10° angle. This provides a level ground clearance of minimum 500mm across the full working width.

When lowering the mowing unit the carrying arm is lowered evenly without one side touching the ground before the rest of the mower, avoiding unnecessary stress and wear on mower or field stubble.



### Parking, safe and sure-footed

With the integrated parking solution, storage of the DMC64100 series is made easy and convenient, requiring a minimum of space during winter storage. The mower is firmly parked on strong and stable parking feet, bringing total height below 4.0m.

### Compact during transport

The mower folds hydraulically for transport and the telescopic frame arm moves to lowest overlap position, to reach a transport height of only 3.9m and a width below 3.0m. And there is no need to leave the tractor before heading off, the outer FlexProtect protection guard hydraulically folds into transport position (option).



Hydraulic foldable guards for fast conversion for transport is available as option.



Integrated swath plates, easily adjusted to correct swath width.



Changing from swathing to widespreading is virtually a one minute job. The swath plates are easily slid to the side and the FlipOver widespreading vanes are turned 180°. No tools are required.







# CurvePilot: Tackle curves with confidence


CurvePilot takes the advantages of hydraulic overlap adjustment to the next level. It is designed to help you maximise capacity during the mowing job and avoid leaving uncut crop. CurvePilot is an automatic system that constantly adjusts overlap between front and rear mowing units so you can utilise the working width and capacity to the maximum.





### **Vario means more productivity**

The Vario hydraulic SideShift is integrated into the carrying arm allowing each mowing unit to move 400mm. To easily compensate for changing field conditions, the adjustable overlap is designed as a telescopic arm, directly into the suspension. During mowing operation the carrying arm always remains even to the ground, giving the mowing unit the freedom to instantly compensate and float across uneven ground contours. The true benefit of the suspension concept is that even though overlap is changed, the chosen ground pressure remains the same.

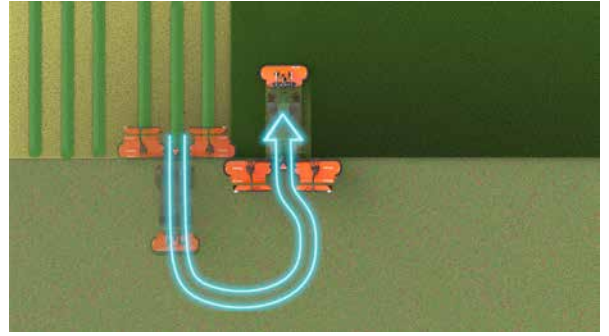

### **Avoid mistakes during headland turnings**

When mowing A-B lines with a GPS steered solution the tractor can make sudden counter steers when starting again on headlands if you are not hitting the exact starting point of the GPS tracks. When this occurs, CurvePilot immediately increases overlap to compensate and avoid leaving uncut crop during headland start.



### **Full capacity on headlands**

When mowing the headland you typically position the mowing units with full overlap, reducing working capacity, to avoid leaving stripes in the field. With CurvePilot as standard you can mow at full working width and utilise the maximum capacity of the mower. CurvePilot will automatically choose the correct minimum overlap.



### **Comfortable passing obstacles**

When mowing up and down the field you will typically mow with the mowing units at the maximum working capacity, leaving very little overlap between the front and rear mowing units. When driving around obstacles in the field, CurvePilot will automatically adjust the overlap and immediately compensates when you makes turns in the field.





# Go all in on versatility

**DMC64100 BX is designed to handle more tasks than ever before. Working in heavy first cut crop, combined with a narrow pick-up width of the following machine, may cause challenges in getting the swath narrow enough. DMC64100 BX offers the possibility of positioning the swath belt in different operating heights, to deliver the crop on top of the swath made by the front mower, to make a narrow and box shaped swath.**

### Shape the swath as you want

Delivery height is set by lowering or raising the belt hydraulically on-the-go. This allows the full-width 3m BX belts to deliver swaths that are directly suited for loader wagons.

With the dual adjustable conditioner plate, efficient crop flow towards the swath belt is easily set. DMC64100 provides a unique opportunity to adjust the conditioner plate at both front and rear ends, to optimize crop flow towards the belts for efficient swath formation, without leaving any material behind.



Kubota BX can deliver the crop at different working height.

### Master headlands

When the mowing units are activated for headland lift, an integrated belt boost automatically speeds up, to empty the belts before they are raised, leaving a clean and tidy headland. Furthermore the AutoStop is activated once belts are raised, automatically stopping them until mowing units are lowered again, keeping fuel consumption low.



An integrated belt boost function automatically kicks in, to empty belts before raised.



One large swath from 10m working width.



Using one belt to move crop away from field boundaries.



100% wide spreading with the standard fitted FlipOver spreading vanes.



Three single swaths, easy set with the integrated swath plates.

### **Belt speed automatically adjustment**

Kubota BX automatically does the job of adjusting belt speed to working width, for the same uniform swath width, regardless of position of mowing units. If the mowing units are sideshifted to adjust overlap, the speed of the belts immediately adjusts, to compensate for the change in throwing distance needed.

When increasing the overlap for mowing around corners, belt speed is lowered to ensure that crop is placed as intended. When using one belt only, speed is reduced to avoid crop being placed too far across the middle.





## #DMC64100 BX



### Did you know?

Did you know that Kubota manufactures products in seven European countries? This proximity to the market is central to the company's philosophy. Each factory adheres to the same high Japanese quality standards, whether it is located in Germany, France, or Japan.

# Change on-the-go: quick release of swath belts

## **Drop excess weight**

During working days, where crop merging is not required, the BX belts are normally raised into an inactive position, turning into unnecessary extra weight on the mower. The weight of the DMC64100 BX belts are in total 600kgs – heavy to carry – adding unnecessary cost to the fuel bill.

## **Swath belt quick coupler**

With the new optional Kubota quick-coupler solution, it is now possible to dismount the two BX belts in less than 10 minutes and park them safely on specially designed transport rollers. When disconnected, the BX belts automatically disappears from the terminal screen.

## **Optimise from day to day**

This gives you the option of deciding from day to day, when work schedule is ready, if belts are needed or not.


All it takes are three simple steps  
– no tools required!



Slide the purpose-built transport rollers onto the BX belt and remove the connection pin.



Disconnect the power cable and all hydraulic connections to BX belt with one single lever.



Lower the mowing units and the BX belt automatically comes off.





#DMC64100-64100 BX



# Make your working day easy

## Portus terminal – easy operation during long work days

The Portus terminal provides handy and ergonomically friendly control that simplifies machine operation. With integrated joystick the Portus comes in a compact size, making it easy to place right next to the operator, so it is ergonomically well positioned for long days of operation. A small screen integrated into the joystick always keeps the tractor driver informed about the chosen operation.

## IsoMatch Grip joystick

The DMC64100 series can be controlled directly by the ISOBUS-tractor via its tractor-terminal. And if it's equipped with an ISOBUS-joystick this is possible too. If not available from the tractor, KvG offers an ISOBUS joystick to make the mowing job more comfortable.

### **IsoMatch Tellus GO+\*** – Compact ISOBUS Terminal

IsoMatch Tellus GO+ is a full ISOBUS terminal. The compact design makes it easy to integrate in the tractor cab. Tellus GO+ is equipped with a 7-inch full colour touch screen with hard keys combined with a rotary switch for direct access to main functions.



### **IsoMatch Tellus Pro Terminal**

The IsoMatch Tellus Pro is a virtual terminal combining two Interface screens in one terminal. The 12" touch screen offers ergonomic use and is designed for clear viewing during long days of operation.



### **Portus Terminal**

Main functions, such as headland lift, adjustment of overlap and setting of ground pressure are easily operated by simply moving the joystick up and down. Portus can be used as separate terminal for non-ISOBUS tractors or in combination with the tractors ISOBUS terminal for easy and convenient operation.



### **IsoMatch Grip Joystick**

The IsoMatch Grip is a fully ISOBUS-joystick that can be programmed to your exact personal preference. Every individual function of the mower (lifting of individual units, ground pressure, belt control etc.), can be assigned to a button on your IsoMatch Grip, so you are always in full control.





#DMC8000-8500

# Kubota suspension for clean cutting action: protecting ground and machine



The DMC8000 and DMC8500 series are engineered with the unique Kubota suspension concept. The complete mowing section including the conditioner is suspended independently from the main chassis by either two or four long adjustable suspension springs, allowing field tracks and contours to be closely followed.

If an obstacle is encountered in the field, the mowing section will lift up and backwards, protecting the cutterbar from damage. When the obstacle is passed, the mowing section automatically returns to the working position.

A simple crank adjusts the whole cutterbar assembly up or down to a desired stubble height. An optional hydraulic stubble height adjustment is available. Additional skids are available to increase cutting height.



Easy adjustment of stubble height.



Optional hydraulic stubble height adjustment for easy setting from tractor cab.



The suspension springs allow the mower to closely follow ground contours in uneven conditions. The cutting section can adapt 500mm up and 150mm down.





### **Accurate sideways adaptation**

The long spring design allows for excellent ground following ability. In uneven fields, the mower is able to adapt +500mm/-150mm.

### **Even ground pressure**

The suspension springs are fitted on the widest possible position of the mowing section to ensure even ground pressure. Weight on ground is stable and only approx. 50–60kg on each side.

### **Effective protection against foreign obstacles**

The suspension rod is fitted between mowing section and mainframe. This ensures that distance between suspension rod and pushing arm is constant. When an obstacle in the field is encountered, the mowing section will move backwards and automatically raise to allow the object to pass. The mower will automatically return to working position once the obstacle is navigated.



The suspension springs ensure excellent sideways adaptation of the complete mowing section.



When an obstacle is encountered, the mowing section is forced backwards and the special suspension rod ensures that the mowing section is automatically lifted upwards and above the object.





#DMC8000-8500



# Trailed mower conditioners: tailored to any request

Including features such as SemiSwing conditioner, low maintenance cutterbar, independent active suspension, swath belt and FlipOver widespreading, DMC8000 and DMC8500 series machines are ready to meet every request with exceptional performance.



The swivel hitch headstock with reversible gearbox provides optimal manoeuvring ability.



### **Tough and reliable In every situation**

Being prepared when mowing needs to take place is essential. Our machines are designed to offer maximum productivity and in addition we have a global support network standing by, dedicated to helping you do more, so you can make the most of the time available.



A lifting height of 500mm, ensures excellent ground clearance for transport and during headland turning.



The mower can be operated on either side of the tractor....



....which saves valuable time.



1



2



3



4

### **Centre pivot drawbar**

The DMC8500 models are supplied with a centre pivot drawbar for mowing both to the right and left sides of the tractor. This important advantage in mower design allows mowing a field in one continuous process, without the need for constantly opening up new 'lands'.

Consequently time consuming short runs are eliminated and mowing capacity is increased. As is the output of the following machinery, as you can prevent creation of triangular or add shaped plots. Turning on headlands is much easier, because the hydraulically operated drawbar allows the turning circle to be significantly reduced, saving time and reducing the number of instances where cut crop is driven over.






# #DMC8000-8500

Did you know?

Did you know that our parts are manufactured to the same high standards and strict specifications as the Kubota machines? Genuine parts will always work and fit as intended, and are guaranteed to keep your machine running at maximum performance.

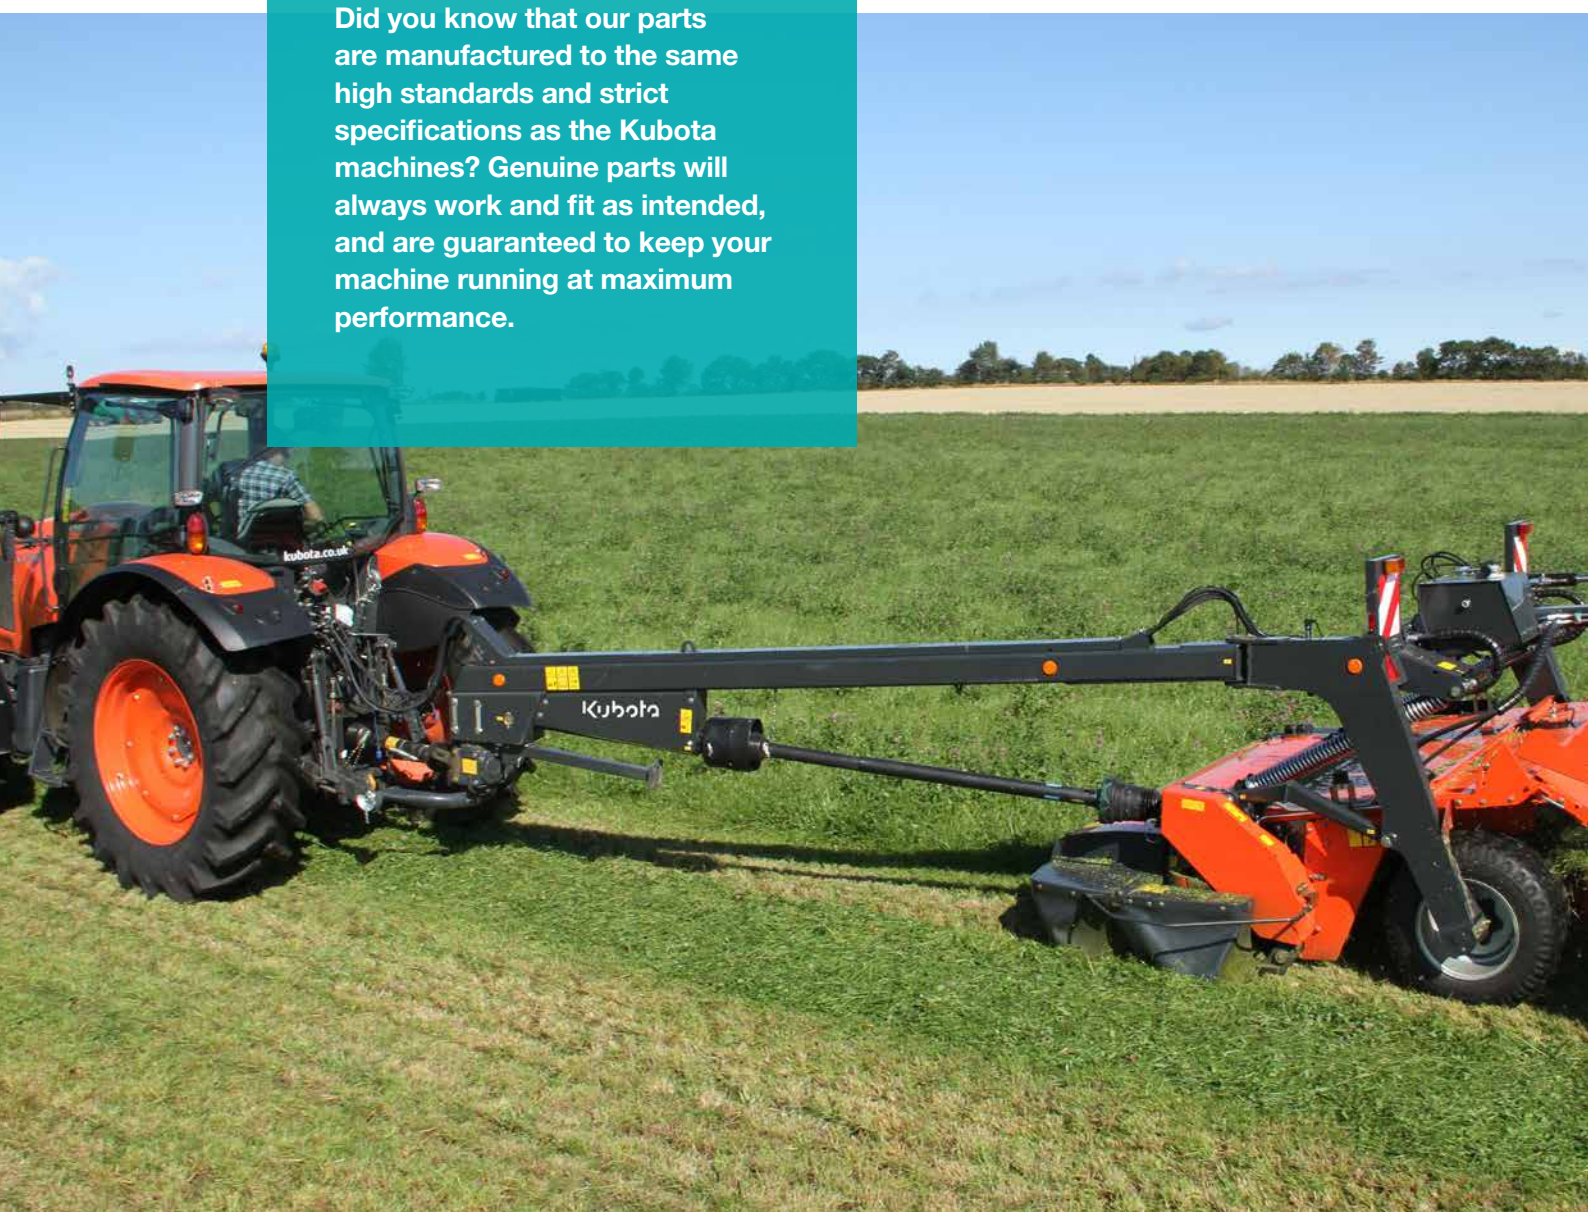

When placing the first swath, the belt is raised and hydraulically lowered for the second swath.



The crop is directed inwards, away from the unmown crop.







# Prepared whatever the weather

**The Kubota DMC8000 and DMC8500 series can be fitted with a versatile swath belt to place two swaths into one. In this way the large swathes for large foragers or balers can be prepared, to speed up the collection of the crop.**

## **The swath belt for improved performance**

The swath belt can be raised and lowered from the tractor seat during operation. This allows you to adapt to each individual situation and requirement, without wasting valuable time.

## **Adjustable belt speed**

The belt speed is infinitely adjustable from the cab. In this way, the swathes can be placed either side by side, or on the top of each other, ensuring a perfect match to the pick-up width of the following machine.

## **Easy-To-Use wide spreading kit**

The Kubota DMC8000 and DMC8500 series can be fitted with an easy-to-use wide spreading kit. This enables the crop to be cut and spread in one operation, saving both time and at least one tedder operation.

## **Hydraulic spreading plate**

The spreading vanes are positioned as far to the rear of the machine as possible when in use. The increased distance from the conditioning rotor to the spreading vanes provides more even spreading of the material across the entire working width, which in turn ensures better wilting.



Setting DMC8000 and DMC8500 mowers for wide spreading is very simple.



Changing from swathing to wide spreading is a one-man job. Simply turn the rear plate 180°.



Dismount the two deflector doors and you are ready to mow.





#DMC7300



# Optimum blend of precision and easy-of-use

The new DMC7300 series front mounted mower conditioners from Kubota brings new options to its line of mower conditioners. The DMC7300 series feature a host of new improvements to bring operator comfort to a higher level. The DMC7300 series is available in either 3.2 or 3.5m working width and with a choice of steel tine or roller conditioner.





### Exceptional adaptation

The suspension design allows a transverse adaptation of 24° along with a total vertical working range of 670mm. If an obstacle is encountered, the ProLink will automatically lift the mower up and back, for maximum protection of cutterbar and machine.



Generous ground clearance for headland turns of 420mm, to pass large swaths without damaging them.



One-touch parking handle, to lock and prepare the machine for dismounting.



Hydraulic folding of FlexProtect guards (optional).



Stubble height adjustment is conveniently integrated directly into the suspension linkage. There is no need to tilt the A-frame of the tractor.





#DMC7300



250 mm



420 mm

Excellent down- and upwards ground following ability of 250mm and 420mm respectively.



# Focus on the essentials

**The complete DMC7300 series mower conditioner is designed for easy servicing and the low maintenance PTO shaft only requires one seasonal greasing.**

## **Easy inspection**

To make routine maintenance and daily inspection check quick and efficient, the design of the front hood has improved, allowing complete access to the cutterbar. When lifted up, the front plate stays in position by a hydraulic cylinder. With an inbuilt magnet, the front tarpaulin will stay on top of the front hood, when folded up.

## **Dual adjustment of conditioner hood**

The new conditioner hood can be adjusted at both front and rear end to customize the conditioner to crop intensity. The build-in swath plates are easily set for swathing or spreading with no need to dismount for wide spreading.

## **Built-In swath plates**

Changing from spreading to swathing or adjusting the swath width to crop conditions is done in seconds. The swath plates automatically expand when being slid inwards to support efficient and accurate swathing, and there is no need to dismount them to achieve full width spreading.




Dual adjustment of conditioner plate to customize to crop intensity.



Front cover is opened into a vertical position for easy access.



Integrated swath plates, easily adjusted to correct swath width.

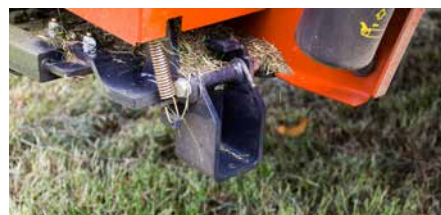

Parking foot is easily activated and keeps the mower in level position when parked.





#DMC7000

# The combination mower

**Kubota DMC7000T/R/N series machines can be used in combination with a variety of mower conditioners, including the DMC8000 or DMC8500 series, DMC6000N, DMC6300T or on its´ own, making these extremely versatile machines. With a working width of 2.8, 3.2 or 3.5m, the capacity of these machines is substantial.**

## **Machines for professionals**

Kubota DMC7000T/R/N series is characterized by an excellent design of the suspension and accurate ground following. In addition the Kubota cutterbar, with outstanding cutting performance and a choice of either SemiSwing steel tine, chevron roller or nylon tine conditioning is fitted onto these machines.

The SemiSwing concept is based on high quality steel tines with low wear and high resistance, and has proven to have significantly reduced maintenance costs. Furthermore these machines are fitted with a variable conditioner rotor speed, to adapt to varying crop conditions - All features making this machine a very professional solution.



## **Did you know?**

Did you know that Kubota manufactures products in seven European countries? This proximity to the market is central to the company's philosophy. Each factory adheres to the same high Japanese quality standards, whether it is located in Germany, France, or Japan.



The suspension design protects the cutterbar against foreign obstacles.



### NonStop BreakAway

To ensure maximum protection of the cutterbar, the Kubota NonStop BreakAway solution is implemented. During normal operation, the cutterbar is angled downwards, but if the Break-Away is activated, the cutterbar angle changes to a horizontal position, due to the geometry of the machine. This prevents the machine from damaging the ground surface.



Kubota DMC7032T with 3.2m working width and a weight of only 1230kg.



Compact design for excellent view during operation...



...and transport.





#DMC7000

# Exceptional adaptation ability

The suspension design has been designed to offer outstanding flotation and even ground pressure. The two large suspension springs have been moved further outwards to provide excellent side stability, which is reflected in optimum protection of the stubble and far less skid wear.

## KUBOTA. Ground following system



Mower reacts instantly to uneven ground contours and can move 250mm down and 450mm up.



Vertical adaptation of 24°  
to adjust to uneven fields.



Heavy duty suspension springs for excellent ground adaptation.

#### **Superior suspension protecting ground and machine**

The moving pattern of the machines is extremely flexible, allowing downwards movements of 250mm and upwards of 450mm.

In addition an innovative suspension design allows a transverse adaptation of 24°. This ensures excellent adaptation to uneven ground contours and higher reachable speed.

#### **Easy operation**

Substantial efforts have been made to make daily operation as easy as possible. The clever design of the suspension creates an undisturbed view of the entire mowing area and excellent overview during transport. A clearance of 350mm is achieved during transport and headland turns.

250 mm







#DMC6000

# Accurate and simple suspension concept

The DMC6000 series is fitted with a highly efficient suspension system that includes centre suspended mowing units, efficient spring suspension and NonStop BreakAway. The mowing units are centre suspended via a suspension spring, to give an even weight distribution across the complete mower width. The benefit is less skid wear, optimum protection of the stubble and less fuel consumption.



## Protection of the cutterbar

Kubota DMC6000 series machines are all fitted with the Kubota NonStop BreakAway system to protect the cutterbar. The integrated NonStop BreakAway autoreset system will protect the cutterbar from foreign obstacles. If an obstacle is hit in the field the mowing unit will swing backwards and up. This gives maximum protection of the cutterbar.

## Effortless protection

There is no need to stop - or even to reverse the tractor to get the mowing unit into working position again. When engaged the spring loaded design ensures that the Kubota NonStop BreakAway system automatically returns the cutting unit to its' original working position.

## Excellent ground adaptation

Faster and more precise adaptation to ground contours is also achieved because of the centre suspended design. The suspension can also be provided with hydraulic setting of ground pressure, easy to adjust, even on the go.



Two mounting options.



Ample clearance during headland turns.



Centre suspension for even weight distribution across the entire working width.



Large compensating spring ensures excellent flotation across the full mower width.



### Two mounting options

DMC6000 series can be adjusted for optimal operation according to different circumstances, such as field contours or working width of the front mounted mower. To ensure optimal overlap between front and rear units, the mowing units can be mounted in two positions on the suspension arm.

### Setting on-the-go

This feature provides easy and simple setting of ground pressure on the Kubota DMC6000 series. For greater operator comfort ground pressure of the large suspension spring is set hydraulically from the tractor cab. Easy to adjust, even on the go.

It is in fact a very simple and clever solution to an important challenge in optimizing the mowing job. On the hydraulic version the tension on the large suspension spring, which controls the ground pressure, is adjusted hydraulically, to increase or lower pressure. The chosen ground pressure level is conveniently registered from the easy-to-read scale. Accurate setting of ground pressure adds to significantly better working result and reduction of fuel consumption, as a mower with correct ground pressure is easier to pull, requiring less power and fuel.







#DMC6000

# Clever characteristics: compact in size, massive in features

The DMC6000 series centre mounted mower conditioner is available in working widths of 2.40, 2.80 and 3.20m. They are fitted with the Kubota cutterbar with slim design for improved cutting performance. They all offer two conditioner rotor speeds, 600 and 900rpm, which can be easily changed by simply switching pulleys, to adapt to different conditioning requirements. At low conditioner speed, fuel consumption is minimized.





Lift on headland with ample clearance to existing swaths.



Two speed gearbox – switched by turning the main gearbox 180°.



### Different conditioning systems

These machines are available with 3 different conditioning systems, roller, nylon and SemiSwing. The roller version offers gentle, yet effective roller conditioning of fragile crop. The nylon tines are very rigid, yet durable, and will flex without breaking if meeting an obstacle. This means excellent protection from stones and other obstacles. SemiSwing offers a very aggressive conditioning effect while still offering excellent tine protection and virtually no wear and tear.

### Turnable gearbox speed

The machines also offer a large degree of operating adaptability, as they are factory fitted with the option of being operated with either 540 or 1000rpm. It requires no additional accessory. All that is needed is to turn the main gearbox on the suspension 180°. Widespreading equipment is also fitted as standard on the machines.

### Clever transport solution

The low gravity point during transport, with the weight of the mower close to the tractor, provides an excellent weight distribution, even during high speed road transport, and the machine is fixed by the hydraulic lifting arm.

In addition transport height is limited, so passing through narrow gateways or under bridges is not a problem. Another benefit is that the hydraulic cylinder also supports quick lifting of the mower from working to headland position.

Optional parking stand for easy, compact storage.



Effective 600/900 nylon tine conditioning.



Easy changeover from swathing to wide spreading.





#DMC6087



# Easy to operate for more uptime: Give efficiency a boost

**DMC6087 has been designed with ease of operation in mind. In fact it is an uncomplicated butterfly combination purpose built to lower operating costs in terms of power and fuel consumptions, with power requirements starting at only 150hp.**





### Easy to operate for more uptime

Equipped with 2 x 3.18m mowing unit, both fitted with 8 triangular discs and choice of either SemiSwing or nylon tine conditioner DMC6087 is geared for productive work days.

### The features that matter

DMC6087 is packed with features that matter, giving it the professional characteristics needed when adjusting the machine for changing conditions. Widespreading is standard fitted and conditioner speed can be set at either 600 or 900rpm by simply turning the gearbox. To ensure optimal overlap between front and rear units, the mowing units can be mounted in two positions on the suspension arm.



Available with either SemiSwing steel tine or nylon tine conditioner.



Mowing with one rear unit only.



Large suspension springs, optionally with hydraulic setting of ground pressure.



### Vertical transport position

For transport the mower folds into a compact position well behind the tractor. The folding design ensures that the weight is distributed evenly, with the weight of the mower close to the tractor. Transport height is well below 4.00m.


### Parking, safe and sure-footed

With the integrated parking solution, storage of the DMC6087N is made easy and convenient, requiring a minimum of space during winter storage. The mower is firmly parked on strong and stable parking feet, bringing total height below 4.00m.



# Kubota Farm Solutions: 360° performance for 100% success

We understand that you need more than powerful tractors and implements to succeed: namely, an integrated system of products and services to increase your competitiveness and preparation for the future. With Kubota Farm Solutions (KFS), we have brought together our solutions in a system— and targeted our proposition to you. From intelligent technology to individual services, the KFS advantages complement each other, forming a circle that ends where it begins: with our commitment to support you a little better every time, now and in the future.

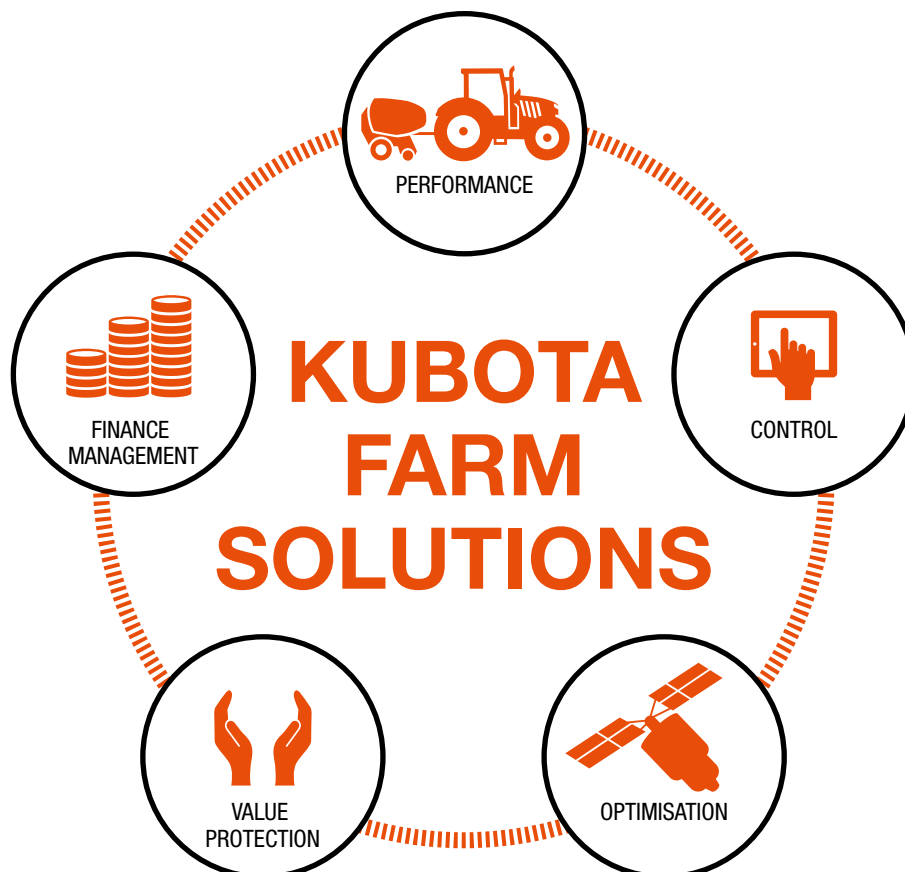



## Performance

You have a clear objective: to get your work done productively and successfully while being relaxed. Kubota offers you the equipment that can best support you in this endeavour. Whichever tractor or implements you decide on, you can always count on proven quality, excellent performance, and co-ordinated features. In short: intelligent and reliable technology that gets you a decisive step closer to your goal.



## Control

You want full control over what you are doing. Kubota provides you with perfectly integrated systems to help you achieve that. From machine optimisation to implement monitoring, you can control the tractor and resources easily from a single terminal. This not only provides you with a better overview of all work processes, but also allows you to work without stress.



## Optimisation

You know exactly how you want to get your work done: efficiently, precisely, and most comfortably. Kubota gives you everything you need to obtain optimal results while remaining at ease. With our ISOBUS technology, precision farming solutions, and automatic steering system, you can apply seeds, fertilisers, and pesticides with extreme precision. This lowers your costs and reduces your workload.



## Value protection

You know what it takes to be commercially successful: top performance with every task and top conditions over many years. Once again, Kubota offers solutions that fulfil what they promise. Our parts are manufactured to the same high standards and strict specifications as the Kubota machines.



## Finance management

You want to improve your productivity, but not at any cost. With Kubota Finance, you can make your planned investment with ease, convenience, and safety. Whether financing or leasing, you benefit from professional advice and attractive conditions. All you need in order to gain the advantages of a technology that drives your success forward. Whether you need machines or services, you have full control of the costs.



# Technical data

Model		DMC 6024N	DMC 6024T	DMC 6028N	DMC 6028T	DMC 6028R	DMC 6032N	DMC 6032T
Conditioner		Nylon	SemiSwing	Nylon	SemiSwing	Roller	Nylon	SemiSwing
<b>Dimensions &amp; weight</b>								
Cutting Width	(m)	2.40	2.40	2.80	2.80	2.80	3.20	3.20
Weight, approx	(kg)	1015	1025	1090	1105	1230	1165	1195
Transport width	(m)	1.90	1.90	2.10	2.10	2.10	2.30	2.30
<b>Attachment to tractor</b>								
Hitch	(CAT)	II	II	II	II	II	II	II
PTO	(RPM)	540/1000	540/1000	540/1000	540/1000	540/1000	540/1000	540/1000
Min. PTO horsepower req.	(kW/hp)	50/70	50/70	60/80	60/80	60/80	65/90	65/90
<b>Operation</b>								
Number of discs		6	6	8	8	8	8	8
Number of knives		18	18	24	24	24	24	24
Stubble height	(mm)	30-60	30-60	30-60	30-60	30-60	30-60	30-60
Cond. rotor speed		900/600	900/600	900/600	900/600	950	900/600	900/600
Number of hydr. outlets		1D	1D	1D	1D	1D	1D	1D
Tyres		-	-	-	-	-	-	-
Drawbar		-	-	-	-	-	-	-
<b>Equipment</b>								
Wide spreading kit		●	●	●	●	●	●	●
FlipOver		-	-	-	-	-	-	-
Swath Belt		-	-	-	-	-	-	-
High skids (+20/+40/+60/+80mm)		o/o/o/o	o/o/o/o	o/o/o/o	o/o/o/o	o/o/o/o	o/o/o/o	o/o/o/o
Throwing wings for diff. crop		o	o	o	o	o	o	o
Lighting kit		o	o	o	o	o	o	o
Hydraulic foldable side guards		-	-	-	-	-	-	-
Dual adj. of conditioner hood		-	-	-	-	-	-	-
Hydraulic Stubble Height adj.		-	-	-	-	-	-	-
Hydraulic Roller Separation		-	-	-	-	-	-	-

Model		DMC 6332T	DMC 6332R	DMC 6336T	DMC 6336T Vario	DMC 6387T	DMC 6387R	DMC 6387T BX
Conditioner		SemiSwing	Roller	SemiSwing	SemiSwing	SemiSwing	Roller	SemiSwing
<b>Dimensions &amp; weight</b>								
Cutting Width	(m)	3.18	3.18	3.50	3.50	8.75	8.75	8.75
Weight, approx	(kg)	1480	1510	1525	1585	3015	3075	3575
Transport width	(m)	3.00	3.00	3.00	3.00	2.8	2.8	2.8
<b>Attachment to tractor</b>								
Hitch	(CAT)	II	II	II	II	II	II	II
PTO	(RPM)	1000	1000	1000	1000	1000	1000	1000
Min. PTO horsepower req.	(kW/hp)	66/90	66/90	90/120	90/120	132/180	132/180	154/210
<b>Operation</b>								
Number of discs		8	8	10	10	2x8	2x8	2x8
Number of knives		24	24	30	30	2x24	2x24	2x24
Stubble height	(mm)	30-60	30-60	30-60	30-60	30-60	30-60	30-60
Cond. rotor speed		1000/700	950	1000/700	1000/700	550/1000	1000	550/1000
Number of hydr. outlets		2D	2D	2D	3D	2D	2D	2D, 1S, 1FR
Tyres		-	-	-	-	-	-	-
Drawbar		-	-	-	-	-	-	-
<b>Equipment</b>								
Wide spreading kit		o	o	o	-	o	o	o
FlipOver		o	o	o	●	o	o	o
Swath Belt		-	-	-	-	o	o	●
High skids (+20/+40/+60/+80mm)		o/o/o/o	o/o/o/o	o/o/o/o	o/o/o/o	o/o/o/o	o/o/o/o	o/o/o/o
Throwing wings for diff. crop		o	o	o	o	o	o	o
Lighting kit		o	o	o	o	o	o	o
Hydraulic foldable side guards		o	o	-	o	o	o	o
Dual adj. of conditioner hood		●	●	●	●	●	-	●
Hydraulic Stubble Height adj.		-	-	-	-	-	-	-
Hydraulic Roller Separation		-	-	-	-	-	-	-

- not available o option ● standard

DMC 6087N	DMC 6087T									
Nylon	SemiSwing									
8.75	8.75									
2245	2375									
3.00	3.00									
II	II									
1000	1000									
110/150	110/150									
2x8	2x8									
2x24	2x24									
30-60	30-60									
900/600	900/600									
2D	2D									
-	-									
-	-									
●	●									
-	-									
-	-									
o/o/o/o/o	o/o/o/o/o									
o	o									
o	o									
-	-									
-	-									
-	-									
-	-									
DMC 6395T	DMC 6395T BX	DMC 64100T	DMC 64100R	DMC 64100T BX	DMC 64100R BX					
SemiSwing	SemiSwing	SemiSwing	Roller	SemiSwing	Roller					
9.50	9.50	9.80-10.20	9.80-10.20	9.80-10.20	9.80-10.20					
3160	3775	3200	3340	3830	3970					
2.8	2.8	2.90	2.90	2.90	2.90					
II	II	II	II	II	II					
1000	1000	1000	1000	1000	1000					
155/210	180/240	150/200	150/200	170/240	170/240					
2x10	2x10	2x10	2x10	2x10	2x10					
2x30	2x30	2x30	2x30	2x30	2x30					
30-60	30-60	30-60	30-60	30-60	30-60					
550/1000	550/1000	1000/700	950	1000/700	950					
2D	2D, 1S, 1FR	LS	LS	LS	LS					
-	-	-	-	-	-					
-	-	-	-	-	-					
o	o	-	-	-	-					
o	o	●	●	●	●					
o	●	-	-	●	●					
o/o/o/o/o	o/o/o/o/o	o/o/o/o/o	o/o/o/o/o	o/o/o/o/o	o/o/o/o/o					
o	o	o	o	o	o					
o	o	o	o	o	o					
o	o	o	o	o	o					
●	●	●	●	●	●					
-	-	-	-	-	-					
-	-	-	-	-	-					



# Technical data

Model		DMC 7028T	DMC 7028N	DMC 7032T	DMC 7032R	DMC 7032N	DMC 7036T	DMC 7332T
Conditioner		SemiSwing	Nylon	SemiSwing	Roller	Nylon	SemiSwing	SemiSwing
<b>Dimensions &amp; weight</b>								
Cutting Width	(m)	2.80	2.80	3.20	3.20	3.20	3.50	3.18
Weight, approx	(kg)	1160	1115	1250	1320	1155	1475	1250
Transport width	(m)	2.70	2.70	3.00	3.00	3.00	3.35	3.00
<b>Attachment to tractor</b>								
Hitch	(CAT)	II	II	II	II	II	II	II
PTO	(RPM)	1000	1000	1000	1000	1000	1000	1000
Min. PTO horsepower req.	(kW/hp)	50/70	50/70	55/80	55/80	55/80	65/90	55/75
<b>Operation</b>								
Number of discs		8	8	8	8	8	10	8
Number of knives		24	24	24	24	24	30	24
Stubble height	(mm)	30-60	30-60	30-60	30-60	30-60	30-60	30-60
Cond. rotor speed		900/600	900/600	900/600	950	900/600	900/600	1000
Number of hydr. outlets		1S	1S	1S	1S	1S	1S	1S
Tyres		-	-	-	-	-	-	-
Drawbar		-	-	-	-	-	-	-
<b>Equipment</b>								
Wide spreading kit		-	-	-	-	-	-	-
FlipOver		-	-	-	-	-	-	-
Swath Belt		-	-	-	-	-	-	-
High skids (+20/+40/+60/+80mm)		o / o / o / o	o / o / o / o	o / o / o / o	o / o / o / o	o / o / o / o	o / o / o / o	o / o / o / o
Throwing wings for diff. crop		o	o	o	o	o	o	o
Lighting kit		o	o	o	o	o	o	o
Hydraulic foldable side guards		-	-	-	-	-	-	o
Dual adj. of conditioner hood		-	-	-	-	-	-	●
Hydraulic Stubble Height adj.		-	-	-	-	-	-	-
Hydraulic Roller Separation		-	-	-	-	-	-	-

Model		DMC 8028T	DMC 8032T	DMC 8032R	DMC 8036T	DMC 8036R	DMC 8532T	DMC 8532R
Conditioner		SemiSwing	SemiSwing	Roller	SemiSwing	Roller	SemiSwing	Roller
<b>Dimensions &amp; weight</b>								
Cutting Width	(m)	2.80	3.20	3.20	3.50	3.50	3.20	3.20
Weight, approx	(kg)	1975	2115	2185	2150	2240	2370	2450
Transport width	(m)	2.70	3.00	3.00	3.40	3.40	3.00	3.00
<b>Attachment to tractor</b>								
Hitch	(CAT)	II	II	II	II	II	II	II
PTO	(RPM)	540/1000	540/1000	540/1000	540/1000	540/1000	540/1000	540/1000
Min. PTO horsepower req.	(kW/hp)	50/70	60/80	60/80	65/90	65/90	60/80	60/80
<b>Operation</b>								
Number of discs		8	8	8	10	10	8	8
Number of knives		24	24	24	30	30	24	24
Stubble height	(mm)	30-60	30-60	30-60	30-60	30-60	30-60	30-60
Cond. rotor speed		900/600	900/600	950	900/600	950	900/600	950
Number of hydr. outlets		1S	1S+1D	1S+1D	1S + 1D	1S+1D	1S+1D	1S+1D
Tyres		380/55-17	380/55-17	380/55-17	380/55-17	380/55-17	380/55-17	380/55-17
Drawbar		Left Hand	Left hand	Left hand	Left hand	Left Hand	Centre	Centre
<b>Equipment</b>								
Wide spreading kit		-	-	-	-	-	-	-
FlipOver		o	o	o	o	o	o	o
Swath Belt		o	o	o	o	o	o	o
High skids (+20/+40/+60/+80mm)		o / o / o / o	o / o / o / o	o / o / o / o	o / o / o / o	o / o / o / o	o / o / o / o	o / o / o / o
Throwing wings for diff. crop		o	o	●	o	●	o	●
Lighting kit		●	●	●	●	●	●	●
Hydraulic foldable side guards		-	-	-	-	-	-	-
Dual adj. of conditioner hood		-	-	-	-	-	-	-
Hydraulic Stubble Height adj.		o	o	o	o	o	o	o
Hydraulic Roller Separation		o	o	o	o	o	o	o

- not available o option ● standard

DMC 7332R	DMC 7336T	DMC 7336R								
Roller	SemiSwing	Roller								
3.18	3.50	3.50								
1340	1385	1445								
3.00	3.35	3.35								
II	II	II								
1000	1000	1000								
55/75	60/80	60/80								
8	10	10								
24	30	30								
30-60	30-60	30-60								
1000	1000	950								
1S	1S	1S								
-	-	-								
-	-	-								
-	-	-								
o/o/o/o	o/o/o/o	o/o/o/o								
o	o	o								
o	o	o								
o	o	o								
●	●	●								
-	-	-								
-	-	-								
DMC 8536T	DMC 8536R									
SemiSwing	Roller									
3.50	3.50									
2450	2565									
3.40	3.40									
II	II									
540/1000	540/1000									
65/90	65/90									
10	10									
30	30									
30-60	30-60									
900/600	950									
1S+1D	1S+1D									
380/55-17	380/55-17									
Centre	Centre									
-	-									
o	o									
o	o									
o/o/o/o	o/o/o/o									
o	●									
●	●									
-	-									
-	-									
o	o									
o	o									











*The company reserves the right to change the above specifications without notice. This brochure is for descriptive purpose only. Some of the items pictured in this brochure are optional and not standard equipment. Please consult your local Kubota dealer for warranty, safety or product information. For your safety, Kubota strongly recommend the use of a seat belt in all applications.*

® = trademark protection in the EU.

©2024 Kverneland Group Kerteminde AS

